

DC SUPER FLEX

Dancutter's extremely flexible cutter



Size range: 3" - 6"



Powerful and Flexible

Extremely flexible in 45° and 90° bends. Effectively cuts, grinds, and mills in diverse materials.

Advanced Control Unit

Equipped with two joysticks, the control unit provides precise control over the motor rotation and cutter arm movements, allowing you to raise, lower, expand, and contract the cutter with ease.

360-degree Continuous Rotation

Enjoy unrestricted operation with a continuous 360-degree continuous rotation feature.

High Manoeuvrability

Automatic feeder and built-in slip ring for seamless back-and-forth movement.

Supply Hose

164 ft hose for tailored operational flexibility.

Enhanced Functionality

The cutter is equipped with a spray nozzle for camera cleaning with air or fluid.



DC MAXI FLEX

DC MAXI FLEX is Dancutter's most powerful cutter



Size range: 4" - 12"

It has an extremely powerful motor which makes the cutter both fast and efficient. The DC MAXI FLEX is flexible and can go through several 45° bends in a 6" pipe and works effortlessly whether the pipe is straight or has bends. If you are mostly working in larger pipes, DC MAXI FLEX is your right choice for reopening laterals or removing hard deposits like concrete.

DC MINI BIKE

Compact, versatile, and powerful cutter



Size Range: 2" - 3"

The DC MINI BIKE is your go-to solution for precise and efficient cutting, grinding, and milling across a variety of materials including PVC, liner, concrete, cast iron, and steel. The DC MINI BIKE, Dancutter's most compact cutter, is specially designed to navigate through narrow pipes (2") and confined spaces. Its small size belies its robust performance, making it an ideal choice for challenging environments.


CUTTING HEADS

Advanced milling and cutting heads are designed for a range of materials including PVC, cement, concrete, cast iron, and steel. We supply. Diamond cutting heads and carbide cutting heads available.



GRABBER

The Dancutter Grabber is a great no-dig tool for removing obstacles inside a pipe. The Grabber is air-driven and easy to mount on the DC SUPER FLEX instead of the air grinder. Grabbing diameter: 2.7 in, 360°-degree continuous rotation, job site interchangeable.

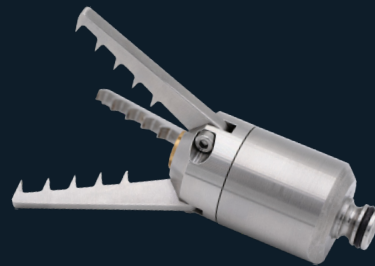


Minicam Headquarters:
12600 Newburgh Rd.
Livonia, MI 48150
info@minicaminc.com

California Service Center:
703 W Anaheim St.
Long Beach, CA 90813
california@minicaminc.com

Florida Service Center:
2332 Old Combee Rd. Suite 107
Lakeland, FL 33805
florida@minicaminc.com

New England Service Center:
1 Industrial Way, Unit 2
Tyngsborough, MA 01879
newengland@minicaminc.com



SCAN ME TO
DISCOVER MORE
ONLINE

